


INFOS TECHNIQUES

Tente de réception, structure autoportée avec un entoilage personnalisé.

Dimensions tente

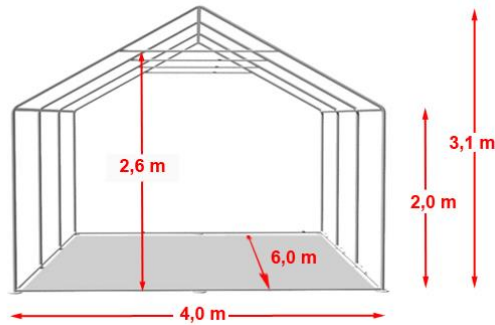

Vendeur

TOOLPORT GmbH/22848 Norderstedt/Allemagne

N° TVA: DE167895255

Registre du commerce: HRB 8223 KI

Toile

Polycoton environ 450g/m²

3i, ignifuge standard Britanniques

Entrée / Sortie : 1m

Rouge foncé - Bordeaux



Conception et réalisation

Chapi-tech SCOP SARL

56130 Nivillac

:

Besoin accès électrique : 1 alimentation en 220 volts avec terre, 16A l'alimentation doit être amenée à l'arrière de la tente.

Besoin espace scénique : 13m/8m / tous types de sol à peu près plat et horizontal

Le chapiteau est sanglé et ancré au sol par 4 pinces.

S'il n'est pas possible d'installer les pinces, prévoir 4 poids de lestage min 150 k

Demandes en personnel :

1 ou 2 techniciens pour le déchargement du camion et le montage de la structure 2h, idem pour le démontage et le chargement.

Véhicules : 1 camion de 20m³



UNIT 1
PARK MILL
BUCKLEY ROAD
ROCHDALE
OL12 9DJ
TELEPHONE: +44 (0) 1706 716370

INFO@BRITISHMILLERAIN.COM
WWW.BRITISHMILLERAIN.COM

Certificate of Conformity

Chapitech
30 ZA Des Metairies
56130 Nivillac
France


Cert No: 4131

Date: 11/02/2016

Advice Note: 42864
Account No: CC1009
Customer Order: email Claire
Quality: Regentex 12 FRW
Batch: 56319
Shade: Brugundy
Description: 407g Plain Weave Polycotton, Fire, Rot and Water

Quantity: 98
Pieces: 2
Comment:
Tested to BS7837

Certified that the whole of these supplies detailed here-on have been tested and unless otherwise stated above, conform in all aspects with the requirements of the contract order. The Quality Control arrangements adopted in respect of these supplies have been accorded the conditions of our ISO 9001: 2000 registration.

Signed: .....
D. Williams

For and on behalf of The British Millerain Co. Ltd.

QP92.8 Rev.3



Proofer, Shrinker, Dyers, Coaters & Finishers.

UNIT 1
 PARK MILL
 BUCKLEY ROAD
 ROCHDALE
 OL12 9DJ
 TELEPHONE: +44 (0) 1706 716370

INFO@BRITISHMILLERAIN.COM
 WWW.BRITISHMILLERAIN.COM

Regentex 12 PW FRW/XP

12oz Plain Weave Polycotton with FRW proofing

PHYSICAL PROPERTY	SPEC	TOL	TEST METHOD	
Weight (g/m ²)	540	+/- 5%	ISO 2286	BSENISO 2286 - 2
Crushed Cone Leakage	0			BS 3408 : 1992
Flammability - Edge	Pass			BS 7837 (BS 5438 2B)
Flammability - Face	Pass			BS 7837 (BS 5438:2A)
Hydrostatic Head as re'd (cm)	60	Min	ISO 811	BS 3424 Pt 26, 29C
Tensile Strength, Warp (N)	1700	Min	EN ISO 13934-1	
Tensile Strength, Weft(N)	1650	Min	EN ISO 13934-1	
Wing Rip Tear, Warp (N)	70	Min		BS EN ISO 13937-3
Wing Rip Tear, Weft (N)	45	Min		BS EN ISO 13937-3

RECOMMENDED CARE INSTRUCTIONS



administrator

The information in this product data sheet is subject to change without notice.

British Millerain Co. Limited makes no warranty of any kind with regard to this fabric performance specification, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. British Millerain Co. Ltd shall not be liable for incidental or consequential damages in connection with the supply, performance or use of this fabric.

Certificates of Conformity and/or Test Reports are available on request

Issue: 1

Date: 01/05/2015.

Page 1 of 1

CHAIRMAN: M.A. MILLER. DIRECTORS: M.L. CUNNINGHAM, DR. D.L. MILLER, DR. J.A. KEEBLE, N.G. ROBERTSON, M. HAIGH
 VAT No. 508 4601 60 REGISTERED IN ENGLAND NO. 185953

